



### Features:

- Design Pressure (DP) / Maximum abnormal pressure (MAP): Up to 775 psig, 53 bar
- Power Supply: 24 VAC
- Actuator Ambient Temperature: -25°F to 130°F, -32°C to 54°C
- Contact factory or visit website for compatibility with CFC, HCFC, HFC and HFO refrigerants and oils
- Valve Refrigerant Temperature: -40°F to 300°F, -40°C to 149°C
- Full shutoff capability
- Gradual open/close stops line hammer
- Remote operating capability
- Removable actuator for quick change replacement
- Manual override and valve positioning
- Electronic overload protection
- UL/cUL Listed, Conforms to Pressure Equipment Directive 2014/68/EU

### Actuated Standard

Part Number	Size		Cv	Kv	A		B		C Min		D		MAP		Wt		Motor	Hub Kit	Actuator Kit***	Heater
	in	mm			in	mm	in	mm	in	mm	in	mm	psig	bar	lb	kg				
AW17861	1/2	13	6.20	5	4.00	102	2.36	60	3.70	94	2.76	70	775	53	2.21	1.00	1	A 18389	A 18390	
AW17862	5/8	17	12.10	10	4.00	102	2.36	60	3.70	94	2.76	70	775	53	2.38	1.08	1	A 18389	A 18390	
AW17863	3/4	19	19.00	16	4.21	107	2.36	60	3.70	94	2.76	70	775	53	2.40	1.09	1	A 18391	A 18392	
AW17864	7/8	22	27.50	24	4.21	107	2.36	60	3.70	94	2.76	70	775	53	2.42	1.10	1	A 18391	A 18392	
AW17865	1 1/8	29	54.00	47	4.58	116	2.36	60	3.70	94	2.76	70	775	53	3.10	1.41	1	A 18391	A 18392	
AW17866	1 3/8	35	89.10	77	5.05	128	2.36	60	5.91	150	3.19	81	775	53	5.53	2.51	2	A 18393	A 18394	A 18366
AW17867	1 5/8	41	114.00	99	5.34	136	2.36	60	5.91	150	3.19	81	775	53	6.94	3.15	2	A 18393	A 18394	A 18366
AW17868	2 1/8	54	244.00	211	6.42	163	2.66	68	8.94	227	3.94	100	700	48	13.14	5.96	3	A 18368	A 18395	A 18367
AW17869	** 2 5/8	67	401.00	347	9.45	240	5.30	135	8.94	227	3.94	100	700	48	23.40	10.61	4	A 18764	A 18765	A 18367 (2)
AW17870	** 3 1/8	79	553.00	478	9.99	254	5.30	135	8.94	227	3.94	100	700	48	31.40	14.24	4	A 18400	A 18401	A 18367 (2)
AW17871	* 2 5/8	67	230.00	199	6.42	163	2.66	68	8.94	227	3.94	100	700	48	13.56	6.15	3	A 18368	A 18395	A 18367
AW17872	* 3 1/8	79	143.00	124	6.42	163	2.66	68	8.94	227	3.94	100	700	48	14.24	6.46	3	A 18368	A 18395	A 18367

### Actuated 3-Way

Part Number	Size		Cv	Kv	A		B		C Min		D		MAP		Wt		Motor	Hub Kit	Actuator Kit***	Heater
	in	mm			in	mm	in	mm	in	mm	in	mm	psig	bar	lb	kg				
AY17861	1/2	13	3.90	3	4.18	106	2.36	60	3.70	94	2.76	70	700	48	2.28	1.03	1	A 18389	A 18390	
AY17862	5/8	17	4.60	4	4.18	106	2.36	60	3.70	94	2.76	70	700	48	2.39	1.08	1	A 18389	A 18390	
AY17863	3/4	19	11.90	10	4.50	114	2.36	60	3.70	94	2.76	70	700	48	3.50	1.59	1	A 18391	A 18392	
AY17864	7/8	22	10.90	9	4.50	114	2.36	60	3.70	94	2.76	70	700	48	3.25	1.47	1	A 18391	A 18392	
AY17865	1 1/8	29	19.30	17	5.02	128	2.36	60	5.91	150	3.19	81	700	48	5.73	2.60	2	A 18393	A 18394	A 18366
A 17810	1 3/8	35	31.10	27	5.44	138	2.36	60	5.91	150	3.19	81	700	48	8.13	3.69	2	A 18368	A 18396	A 18366
A 17811	1 5/8	41	44.70	39	6.22	158	2.66	68	8.94	227	3.94	100	700	48	12.00	5.44	3	A 18368	A 18395	A 18367
AY17868	2 1/8	54	76.30	66	6.54	166	2.66	68	8.94	227	3.94	100	700	48	13.23	6.00	3	A 18368	A 18395	A 18367
AY17871	* 2 5/8	67	69.90	60	6.54	166	2.66	68	8.94	227	3.94	100	700	48	14.09	6.39	3	A 18368	A 18395	A 18367
AY17872	* 3 1/8	79	58.20	50	6.54	166	2.66	68	8.94	227	3.94	100	700	48	14.64	6.64	3	A 18368	A 18395	A 18367

\* Reduced Port

\*\* Consists of two stacked motors operating in tandem

\*\*\* Actuator Kit includes Motor and Hub

Prefix AWS Actuator includes auxillary switch

Prefix AYS Actuator includes auxillary switch

Suffix -KIT Weatherproof Enclosure Kit includes ball valve, actuator and hub kit with enclosure

Warning Heater assembly required for low temperature applications

Warning Motors not for use in wet or applications where moisture will condense on motor

# CYCLEMASTER® Ball Valves Actuated




Tonnage calculations are based on the following conditions:  
 Evaporator temperature: 40°  
 Vapor temperature exiting evaporator: 10°F superheated  
 Liquid temperature entering evaporator: 100°F  
 Hot gas temperature: 140°F  
 Pressure drop across valve: 1 psig


## Motor Specifications

Motor Series	Torque (in-lb)	Power Consumption (VA)	Running Time (seconds)
1	44	2.5	90
2	132	3.0	125
3	310	7	125
4 **	620	12	125

## Actuated Standard

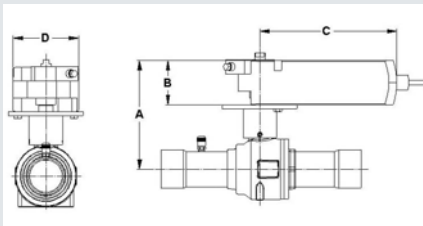

## Actuated 3-Way

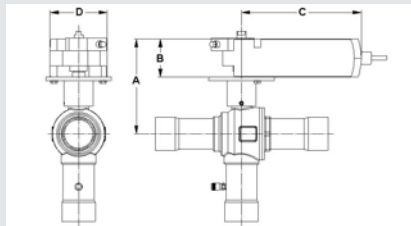

Part Number	Liquid Capacity (tons)					Suction Capacity (tons)					Hot Gas Capacity (tons)				
	R22	R134a	R404A/ R507	R407C	R410A	R22	R134a	R404A/ R507	R407C	R410A	R22	R134a	R404A/ R507	R407C	R410A
AW17861	19.0	17.7	12.2	18.13	17.8	2.7	2.1	2.2	2.52	3.1	3.9	3.2	3.2	4.05	4.5
AW17862	36.9	34.5	23.8	35.27	34.6	5.2	4.1	4.3	4.90	6.0	7.5	6.2	6.2	7.87	8.7
AW17863	58.0	54.1	37.4	55.40	54.4	8.1	6.4	6.8	7.69	9.5	11.8	9.7	9.7	12.37	13.7
AW17864	84.1	78.4	54.2	80.27	78.8	11.8	9.2	9.8	11.15	13.7	17.1	14.1	14.0	17.92	19.8
AW17865	165.3	154.3	106.5	157.86	154.9	23.2	18.1	19.4	21.92	27.0	33.7	27.7	27.6	35.24	38.9
AW17866	272.9	254.7	175.8	260.62	255.8	38.3	29.9	32.0	36.19	44.6	55.6	45.7	45.6	58.18	64.2
AW17867	348.7	325.3	224.6	332.95	326.8	49.0	38.2	40.8	46.23	57.0	71.1	58.4	58.3	74.33	82.1
AW17868	746.8	696.9	481.2	713.19	699.9	104.9	81.9	87.5	99.03	122.2	152.3	125.0	124.8	159.21	175.8
AW17869	1227.6	1145.5	791.0	1172.30	1150.5	172.4	134.6	143.8	162.78	200.8	250.3	205.5	205.2	261.71	289.0
AW17870	1693.7	1580.4	1091.3	1617.41	1587.4	237.9	185.8	198.4	224.58	277.0	345.3	283.5	283.1	361.08	398.7
AW17871	705.3	658.2	454.5	673.57	661.1	99.1	77.4	82.6	93.53	115.4	143.8	118.1	117.9	150.37	166.0
AW17872	439.3	409.9	283.0	419.50	411.7	61.7	48.2	51.5	58.25	71.9	89.6	73.5	73.4	93.65	103.4
AY17861	12.1	11.3	7.8	11.52	11.3	1.7	1.3	1.4	1.60	2.0	2.5	2.0	2.0	2.57	2.8
AY17862	14.2	13.2	9.1	13.54	13.3	2.0	1.6	1.7	1.88	2.3	2.9	2.4	2.4	3.02	3.3
AY17863	36.4	34.0	23.5	34.79	34.1	5.1	4.0	4.3	4.83	6.0	7.4	6.1	6.1	7.77	8.6
AY17864	33.3	31.1	21.5	31.84	31.2	4.7	3.7	3.9	4.42	5.5	6.8	5.6	5.6	7.11	7.8
AY17865	59.2	55.2	38.1	56.52	55.5	8.3	6.5	6.9	7.85	9.7	12.1	9.9	9.9	12.62	13.9
A 17810	95.1	88.7	61.3	90.81	89.1	13.4	10.4	11.1	12.61	15.6	19.4	15.9	15.9	20.27	22.4
A 17811	136.8	127.7	88.2	130.66	128.2	19.2	15.0	16.0	18.14	22.4	27.9	22.9	22.9	29.17	32.2
AY17868	233.7	218.0	150.6	223.14	219.0	32.8	25.6	27.4	30.98	38.2	47.6	39.1	39.1	49.81	55.0
AY17871	213.9	199.6	137.8	204.22	200.4	30.0	23.5	25.1	28.36	35.0	43.6	35.8	35.7	45.59	50.3
AY17872	178.2	166.2	114.8	170.13	167.0	25.0	19.5	20.9	23.62	29.1	36.3	29.8	29.8	37.98	41.9