





**Features:**


- Design Pressure (DP) / Maximum abnormal pressure (MAP): 700 psig, 48 bar
- Continuous operating temperature (COT): -40°F/300°F, -40°C/149°C
- Pressure to open: < 1 psi
- Contact factory or visit website for compatibility with CFC, HCFC, HFC and HFO refrigerants and oils
- UL/cUL Recognized, Conforms to Pressure Equipment Directive 2014/68/EU
- Neoprene seat for positive isolation and pulsation dampening
- Enhanced internal design for maximum flow and minimum pressure drop



**Flare to Flare**

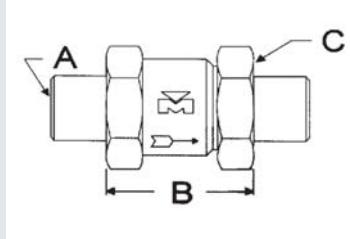

**Solder to Solder**

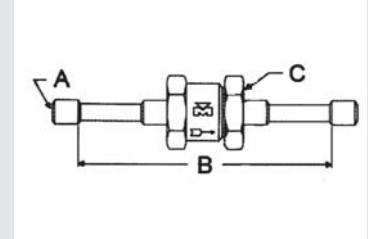

**Solder to Solder, Extended Ends**

**Flare to Flare**

Part Number	Size A		B		C		Wt	
	in	mm	in	mm	in	mm	lb	kg
A 15620	1/4	6	2.25	57	13/16 Hex	21 Hex	0.15	0.07
A 15621	3/8	10	2.40	61	13/16 Hex	21 Hex	0.20	0.09
A 15622	1/2	13	3.00	76	1 1/4 Oct	32 Oct	0.43	0.19
A 15623	5/8	17	3.20	81	1 1/4 Oct	32 Oct	0.51	0.23

**Solder to Solder**

Part Number	Size A		B		C		Wt		
	in	mm	in	mm	in	mm	lb	kg	
A 15628	*	1/4	6	1.14	29	13/16 Hex	21 Hex	0.13	0.06
A 15629	*	3/8	10	1.14	29	13/16 Hex	21 Hex	0.13	0.06
A 15631	*	5/8	17	1.44	37	1 1/4 Oct	32 Oct	0.36	0.16
A 15632	**	1/4	6	4.40	112	13/16 Hex	21 Hex	0.16	0.07
A 15633	**	3/8	10	4.70	119	13/16 Hex	21 Hex	0.18	0.08
A 15634	**	1/2	13	4.90	124	1 1/4 Oct	32 Oct	0.43	0.20
A 15635	**	5/8	17	5.20	132	1 1/4 Oct	32 Oct	0.48	0.22
Pressure Relief V		1/2	13	1.44	37	1 1/4 Oct	32 Oct		