



Ball Valve Manifold

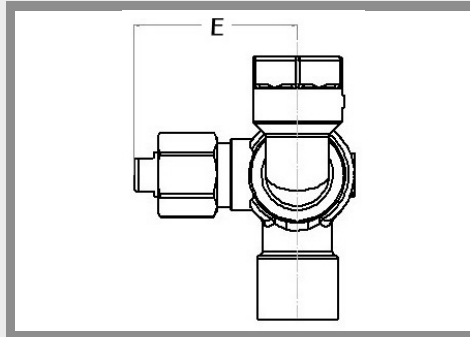

Features:

- Maximum abnormal pressure (MAP): 1305 psig, 90 bar
- Continuous operating temperature (COT): -40°F/300°F, -40°C/149°C
- Compatible with all CFC, HCFC and HFC refrigerants and oils
- Suitable for CO2 applications
- Allows easy replacement of attached relief valves and rupture discs while the system is operative.
- Offers solution for applications requiring a ball valve style pressure relief valve manifold
- Internally equalized ball design
- Rupture-proof encapsulated stem

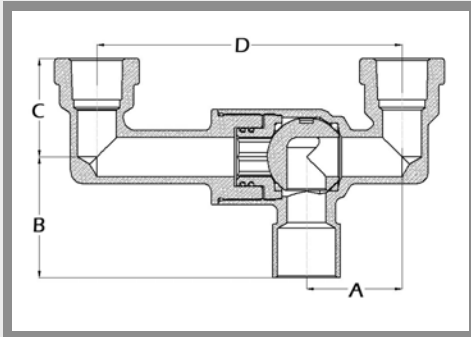

Part Number	Inlet ODS	Outlet NPT	A		B		C		D		E		Wt	
			in	mm	in	mm	in	mm	in	mm	in	mm	lb	kg
A 18730	7/8	1/2	1.45	37	1.83	46	1.50	118	4.63	118	2.07	52	1.60	0.73
A 19043	1/2	1/2	1.45	37	1.83	46	1.50	118	4.63	118	2.07	53	1.66	0.75

