




DRYMASTER® Heat Pump Filter Drier Installation Instructions


Symbol	Connection	System Compatibility
	3/8 1/2 5/8 7/8	CFC, HCFC & HFC
	3/8 1/2 5/8	



Wet wrap to prevent damage. Use wet rag and wrap filter as shown.

Use 5% Ag.



Keep flames away from body.




Note: Maximum working pressure shall not be less than the pressure outlined in section 8.2 of ANSI/ASHRAE 15 for the refrigerant used in the system. After charging, the systems shall be marked with the refrigerant and the oil used.

FORM: INST-031
5/16

DRYMASTER® Heat Pump Filter Drier Installation Instructions


Symbol	Connection	System Compatibility
	3/8 1/2 5/8 7/8	CFC, HCFC & HFC
	3/8 1/2 5/8	

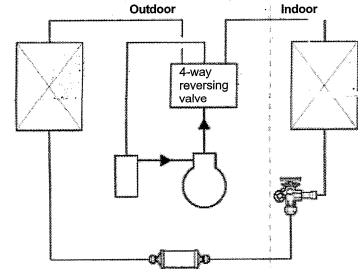

Wet wrap to prevent damage. Use wet rag and wrap filter as shown.

Use 5% Ag.



Keep flames away from body.




Note: Maximum working pressure shall not be less than the pressure outlined in section 8.2 of ANSI/ASHRAE 15 for the refrigerant used in the system. After charging, the systems shall be marked with the refrigerant and the oil used.

FORM: INST-031
5/16

DRYMASTER® Heat Pump Filter Drier Installation Instructions


Symbol	Connection	System Compatibility
	3/8 1/2 5/8 7/8	CFC, HCFC & HFC
	3/8 1/2 5/8	



Wet wrap to prevent damage. Use wet rag and wrap filter as shown.

Use 5% Ag.



Keep flames away from body.




Note: Maximum working pressure shall not be less than the pressure outlined in section 8.2 of ANSI/ASHRAE 15 for the refrigerant used in the system. After charging, the systems shall be marked with the refrigerant and the oil used.

FORM: INST-031
5/16

DRYMASTER® Heat Pump Filter Drier Installation Instructions


Symbol	Connection	System Compatibility
	3/8 1/2 5/8 7/8	CFC, HCFC & HFC
	3/8 1/2 5/8	

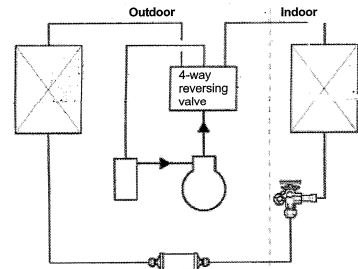

Wet wrap to prevent damage. Use wet rag and wrap filter as shown.

Use 5% Ag.

Keep flames away from body.



Note: Maximum working pressure shall not be less than the pressure outlined in section 8.2 of ANSI/ASHRAE 15 for the refrigerant used in the system. After charging, the systems shall be marked with the refrigerant and the oil used.

FORM: INST-031
5/16