



Features:

- Design Pressure (DP) / Maximum abnormal pressure (MAP): 700 psig, 48 bar
- Continuous operating temperature (COT): -40°F/300°F, -40°C/149°C
- Contact factory or visit website for compatibility with CFC, HCFC, HFC and HFO refrigerants and oils
- Neoprene seat for positive isolation and pulsation dampening
- Enhanced internal design for maximum flow and minimum pressure drop

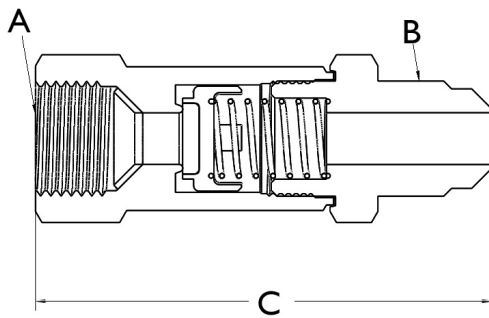

Part Number	Model	A (Female Flare)		B (Flare)		C		Hex Size		Pressure to Open	Wt	
		in	mm	in	mm	in	mm	in	mm		lb	kg
A 18738	VV-10	3/8	63	3/8	63	2.48	63	13/16 Hex	21 Hex	10 psi	0.23	0.11
A 18739	VV-20	3/8	63	3/8	63	2.48	63	13/16 Hex	21 Hex	20 psi	0.23	0.11
A 18740	VV-30	3/8	63	3/8	63	2.48	63	13/16 Hex	21 Hex	30 psi	0.23	0.11