



Features:


- Design Pressure (DP) / Maximum abnormal pressure (MAP): 700 psig, 48 bar
- Continuous operating temperature (COT): -40°F/185°F, -40°C/85°C
- Contact factory or visit website for compatibility with CFC, HCFC, HFC and HFO refrigerants and oils
- UL/cUL Recognized, Conforms to EU Pressure Equipment Directive and UK Pressure Equipment Regulation
- Designed for maximum flow and minimum pressure drop
- Large viewing window and indicator for better visibility
- Provides accurate identification of system conditions

Flare x Flare

Part Number	Size		A		Thread	B		Wt	
	in	mm	in	mm		in	mm	lb	kg
A 18101	1/4	6	1.06	27	7/16-20UNF	2.75	70	0.33	0.15
A 18102	3/8	10	1.06	27	5/8-18 UNF	3.00	76	0.43	0.20
A 18103	1/2	13	1.30	33	3/4-16 UNF	3.25	83	0.50	0.23
A 18104	5/8	17	1.30	33	7/8-14 UNF	3.45	88	0.53	0.24


Flare x Swivel

Part Number	Size		A		B		Wt	
	in	mm	in	mm	in	mm	lb	kg
A 18110	1/4	6	1.06	27	2.90	74	0.35	0.16
A 18111	3/8	10	1.06	27	2.95	75	0.38	0.17
A 18112	1/2	13	1.30	33	3.37	86	0.61	0.28
A 18113	5/8	17	1.30	33	3.37	86	0.63	0.29

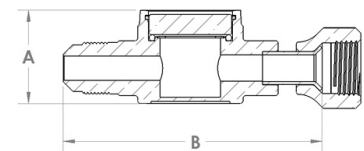
M x F Flare

Part Number	Size		A		Thread	B		Wt	
	in	mm	in	mm		in	mm	lb	kg
A 18106	1/4	6	1.06	27	7/16-20 UNF	2.45	62	0.31	0.14
A 18107	3/8	10	1.30	33	5/8-18 UNF	3.00	76	0.55	0.25
A 18108	1/2	13	1.30	33	3/4-16 UNF	2.85	72	0.46	0.21

