



Features:

- Design Pressure (DP) / Maximum abnormal pressure (MAP): 700 psig, 48 bar
- Continuous operating temperature (COT): -40°F/185°F, -40°C/85°C
- UL/cUL Recognized, Conforms to EU Pressure Equipment Directive and UK Pressure Equipment Regulation
- Designed for maximum flow and minimum pressure drop
- Large viewing window and indicator for better visibility
- Provides accurate identification of system conditions
- For use with TSD Filter Driers (sold separately)

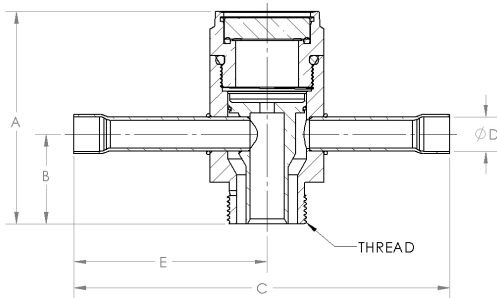

Part Number	Size		Thread	A		B		C		E		Wt		Replacement Parts		
	in	mm		in	mm	in	mm	in	mm	in	mm	lb	kg	Cap Assembly	O-Ring	Gasket
A 19213	3/8	10	7/8"-20UNEF-2B	2.33	59	1.00	25	4.13	105	2.01	51	0.58	0.26	A 18623	P 34701	P 37921
A 19214	1/2	13	7/8"-20UNEF-2B	2.33	59	1.00	25	3.82	97	1.85	47	0.58	0.26	A 18623	P 34701	P 37921