




Features:

- Design Pressure (DP) / Maximum abnormal pressure (MAP): 700 psig, 48 bar
- Continuous operating temperature (COT): -40°F/300°F, -40°C/149°C
- Contact factory or visit website for compatibility with CFC, HCFC, HFC and HFO refrigerants and oils
- UL/cUL Recognized, Conforms to EU Pressure Equipment Directive and UK Pressure Equipment Regulation, CRN OC1241.9C
- Forged brass body
- Plated steel stem suitable for refrigerants and other industrial fluids non-corrosive to brass and steel
- Asbestos-free stem packing material

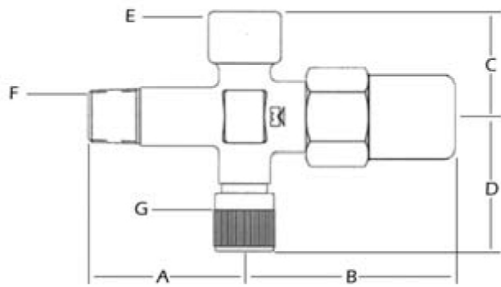

NPTFI x NPTFE

Part Number	A		B		C		D		E NPTFI	F NPTFE	G	Standard Cap		Replacement Seal Cap		Wt	
	in	mm	in	mm	in	mm	in	mm				Material	Seal Cap	Brass	Plastic	lb	kg
NPTFI X NPTFE																	
B 34254	1.50	38	2.00	51	1.03	26	1.25	32	1/8	1/4	1/4	Brass	A 16474	A 16474	P 34627	0.43	0.20
A 19084 **	1.50	38	2.40	61	1.03	26	1.25	32	1/4	1/4	1/4	Brass	A 16474	A 16474	P 34627	0.44	0.20
NPTFI X NPTFE WITH VALVE CORE																	
B 35334 **	1.50	38	2.40	61	1.03	26	1.25	32	1/4	1/4	1/4	Plastic	P 34627	A 16474	P 34627	0.34	0.16
A 19085 **	1.50	38	2.40	61	1.03	26	1.25	32	1/4	1/4	1/4	Brass	A 16474	A 16474	P 34627	0.45	0.20

NPTFI x ODS

Part Number	A		B		C		D		E NPTFI	F ODS	G	Standard Cap		Replacement Seal Cap		Wt	
	in	mm	in	mm	in	mm	in	mm				Material	Seal Cap	Brass	Plastic	lb	kg
NPTFI X ODS																	
B 35162 **	1.50	38	2.04	52	1.00	25	1.28	33	1/8	3/8	1/4	Brass	A 16474	A 16474	P 34627	0.43	0.20
B 35593 **	1.50	38	2.44	62	1.03	26	1.32	34	1/4	3/8	1/4	Brass	A 16474	A 16474	P 34627	0.44	0.20

* Brass Seal Cap, includes copper gasket

** Pack gland, packing and pack washer packaged separately in bag. Stem and seal cap loosely assembled in valve.