




Features:

- Design Pressure (DP) / Maximum abnormal pressure (MAP): 700 psig, 48 bar
- Continuous operating temperature (COT): -40°F/300°F, -40°C/149°C
- Contact factory or visit website for compatibility with CFC, HCFC, HFC and HFO refrigerants and oils
- UL/cUL Recognized, Conforms to EU Pressure Equipment Directive and UK Pressure Equipment Regulation
- 100% tested
- Asbestos-free valve packing
- Valve openings designed for maximum flow and minimum pressure drop
- Flat Gasket Surface

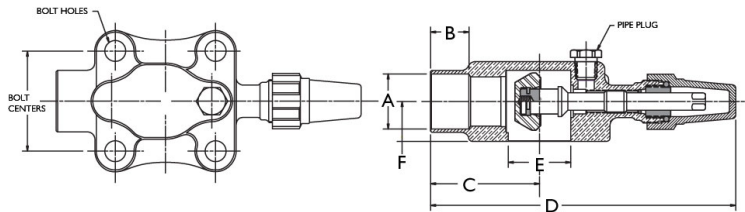

Valve Part Number	Valve Kit Part Number*	A		B		C		D		E		F		Bolt Centers		Bolt Hole Diameter		Pipe Plug Size		Flange Thickness		Seat Position	Valve Wt		Valve Kit Wt	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm		lb	kg	lb	kg
B 32807	A 17532	1 1/8	29	0.90	23	2.72	69	7.61	193	1.56	40	1.00	25	2.5	64	.53	13	1/4			Mid	4.00		4.47	2.03	
B 32808	A 17533	1 3/8	35	0.96	24	2.72	69	7.61	193	1.56	40	1.00	25	2.5	64	.53	13	1/4			Mid	3.98		4.67	2.12	
B 32930	A 17534	1 5/8	41	1.10	28	2.88	73	7.89	200	1.81	46	1.03	26	2.5	64	.53	13	1/4			Mid	4.13		4.67	2.12	

Torque To Seal

Front Seat		Back Seat		Pack Gland		Pipe Plug		Plastic Cap		Brass Cap		Steel Cap	
(ft-lb)	(N-m):	(ft-lb)	(N-m):	(ft-lb)	(N-m):					(ft-lb)	(N-m)	(ft-lb)	(N-m)
22 - 40	30 - 54	25 - 45	34 - 61	10 - 15	14 - 20	2 - 3 Threads Exposed		Hand Tight		40 - 50	54 - 68	NA	NA

References

Valve Part Number	Valve Kit Part Number*	Body Number	Standard Seal Cap			Replacement Seal Cap		Replacement Kit**	Manufacturer Reference to Valve Kit Part Number	
			Material	Seal Cap *****	Kit	Plastic*****	Brass*****		Carrier	Copeland
B 32807	A 17532	F 27950	Plastic	P 34632	P 35915	P 34632	A 15099	A 17418	06DA660-063	
B 32808	A 17533	F 27955	Plastic	P 34632	P 35915	P 34632	A 15099	A 17418	06DA660-065	
B 32930	A 17534	F 29201	Plastic	P 34632	P 35915	P 34632	A 15099	A 17418	06DA660-090	

- * Valve kit includes valve, gasket and bolts
- ** Replacement kit contains components to pack stem (pack gland, packing and pack washer)
- *** Cap and cap gasket kit
- **** Seal cap and o-ring kit
- ***** O-ring included